



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : G01N 21/76, H01J 1/62 H03K 4/00, 4/00, 4/02 H03K 4/06</p>	A1	<p>(11) International Publication Number: WO 90/11511</p> <p>(43) International Publication Date: 4 October 1990 (04.10.90)</p>
<p>(21) International Application Number: PCT/US90/01370</p> <p>(22) International Filing Date: 15 March 1990 (15.03.90)</p> <p>(30) Priority data: 325,459 17 March 1989 (17.03.89) US</p> <p>(71) Applicant: IGEN, INC. [US/US]; 1530 East Jefferson Street, Rockville, MD 20852 (US).</p> <p>(71)(72) Applicants and Inventors: HALL, Lee, O. [US/US]; 18221-102 Lost Knife Circle, Gaithersburg, MD 20879 (US). ZOSKI, Glenn [US/US]; 16220 Grist Mill Road, Rockville, MD 20855 (US). TYAGI, Surendera, K. [IN/US]; 26 Crestwood Drive C, Gaithersburg, MD 20877 (US).</p>		<p>(74) Agent: EVANS, Barry; Curtis, Morris & Safford, 530 Fifth Avenue, New York, NY 10036 (US).</p> <p>(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>
<p>(54) Title: METHOD AND APPARATUS FOR CONDUCTING ELECTROCHEMILUMINESCENT MEASUREMENTS</p>		
<p>(57) Abstract</p> <p>A method and apparatus for triggering and measuring electrochemiluminescent phenomena using a voltage waveform applied at the voltammetric working electrode which improves the precision and accuracy of measurements. This waveform has a decreasing scan rate in the range of voltages for which electrochemiluminescence is triggered and is substantially sinusoidal in shape in this range. The waveform results from locating the reference electrode (20) of a potentiostat in close potential proximity to its counter electrode (16), and applying a uniform scanning voltage waveform at the reference electrode (20). The waveform also can be synthesized digitally, converted to analog form, and applied directly to the working electrode (18) with the reference electrode (20) in close potential proximity to the working electrode (18).</p> <div style="text-align: center;"> <p>TO SAMPLE SOLUTION</p> </div>		

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Faso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	HU	Hungary	NO	Norway
BJ	Benin	IT	Italy	RO	Romania
BR	Brazil	JP	Japan	SD	Sudan
CA	Canada	KP	Democratic People's Republic of Korea	SE	Sweden
CF	Central African Republic	KR	Republic of Korea	SN	Senegal
CG	Congo	LI	Liechtenstein	SU	Soviet Union
CH	Switzerland	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany, Federal Republic of	MC	Monaco	US	United States of America
DK	Denmark				

METHOD AND APPARATUS FOR CONDUCTING ELECTROCHEMILUMINESCENT MEASUREMENTS
FIELD OF THE INVENTION

This invention relates to electrochemiluminescent phenomena and more particularly to a system and method for detecting and measuring
5 electrochemiluminescent phenomena.

BACKGROUND OF THE INVENTION

Measurement techniques for electrochemiluminescence (ECL) derive from electrochemistry (EC) and chemiluminescence (CL). EC
10 deals generally with the relation of electricity to chemical changes and with the interconversion of chemical and electrical energy.

CL based assay or detection techniques generally comprise forming a mixture of a sample
15 containing an unknown amount of an analyte of interest with a known amount of a reactant which is conjugated with a chemiluminescent label. The mixture is incubated to allow the labeled reactant to bind to the analyte and then is separated into a bound and an
20 unbound fraction. One or both fractions are caused to luminesce by, for example, the addition of an oxidant to the fractions. The measured level of chemiluminescence at a specific wavelength is indicative of the amount of the bound or unbound
25 fraction, and one skilled in the art can determine from such measurements the amount of analyte in the sample.

ECL detection techniques provide a sensitive and controllable measurement of the presence and amount of an analyte of interest. In ECL, the incubated sample is exposed to a voltammetric working electrode, i.e., an electrode to which a voltage is applied and into which a current for a redox reaction is passed. The ECL mixture does not react with the chemical environment alone, as does the CL mixture, or with an electric field alone, as in EC, but rather electrochemiluminescence is triggered by a voltage impressed on the working electrode at a particular time and in a particular manner to controllably cause the ECL sample to emit light at the electrochemiluminescent wavelength of interest. The measurement is not the current at the electrode, as in EC, but the frequency and intensity of emitted light.

The operating conditions affecting an ECL measurement should be controlled from sample to sample before and during each measurement. A knowledge of these operating conditions is necessary to provide measurement results which are reproducible within useful limits. Because of the complexity of these conditions, however, and because the specific nature of all the chemical changes and reactions occurring during ECL is not completely known, there are substantial difficulties in reaching this goal.

Employees of the present assignee, under an obligation of assignment to it, have found that

techniques which improve the measurement of current in EC do not necessarily improve the measurement of the frequency and intensity of light emitted during ECL. The optimal conditions for ECL measurements must meet
5 different criteria.

The voltage waveform impressed upon the voltammetric electrode of an ECL cell must be sufficient to trigger electrochemiluminescence. This voltage waveform usually is in the form of a uniform
10 voltage sweep starting at a first voltage, moving steadily to a second voltage, moving back through the first voltage to a third voltage and then back again to the first voltage. Other waveforms have been applied in practice, however, and can trigger ECL.

15 In order to be meaningful, the ECL measurement must be precise, i.e., repeatable within strict limits with the same operating conditions and ECL sample. The measurement also must be accurate, i.e., within acceptable limits of the actual con-
20 centration of analyte present in the sample. Since the ECL reaction chemically changes the sample, only one ECL measurement generally can be taken for each sample. These chemical changes occur predominantly within a thin layer of the sample adjacent the working
25 electrode.

Precision and accuracy are sensitive to, among other things, the voltage waveform impressed upon the working electrode to trigger

electrochemiluminescence. Although an optimal waveform may exist theoretically for a given sample and operating conditions, achieving this waveform is difficult because of the multiplicity of factors
5 affecting the ECL response. The present inventors have found, however, that certain modifications in conventional waveforms, apparatus and techniques, which effectively diminish the extent to which this waveform is controlled at its operative point adjacent
10 the working electrode, unexpectedly increase the quality of an ECL response and the precision and accuracy of its measurement.

OBJECTS AND SUMMARY OF THE INVENTION

It is an object of the present invention to
15 provide a method and apparatus for improving the precision and accuracy of electrochemiluminescent measurements.

It is another object of this invention to provide a voltage waveform for triggering ECL which
20 improves an ECL response and its measurement.

It also is an object of the present invention to provide a method and apparatus for impressing a voltage
waveform on an ECL cell which enhances the precision
25 and accuracy of ECL measurements.

It is a further object of the present invention to provide a method and apparatus for

applying an improved waveform on an ECL cell using a potentiostat.

It is yet another object of the present invention to provide a method and apparatus for
5 synthesizing a controlled voltage waveform for application to the working electrode of an ECL cell.

In accordance with one aspect of the present invention, the uniform scanning voltage waveform applied to the working electrode of an ECL cell to
10 trigger electrochemiluminescence is modified such that the precision and accuracy of ECL measurements are improved. This modified waveform is substantially sinusoidal in shape at the voltages where ECL is triggered. This modification advantageously causes
15 the ECL reaction to slow and occur more uniformly and consistently and enables ECL measurements to be made more precisely and accurately.

A conventional electrochemical or ECL cell comprises a working electrode, a counter electrode and
20 a reference electrode, and the voltage waveform for triggering electrochemiluminescence is applied to the working electrode using a potentiostat. The potentiostat applies a controlled voltage waveform at the reference electrode, with respect to the working
25 electrode, and the working electrode is maintained at virtual ground. In order that the waveform adjacent the working electrode is known and controlled, the

reference electrode is placed in close potential proximity to the working electrode.

In accordance with another aspect of this invention, the reference electrode of the ECL cell is placed in close potential proximity to the counter electrode, and a controlled voltage waveform is applied at the reference electrode. This placement diminishes the extent to which the waveform applied at the working electrode can be controlled. Because of the voltage drop within the cell between the counter and working electrodes, this waveform becomes modified at its operative point adjacent the working electrode. The amount of modification is substantially proportional to the resistance of the solution in the cell and the current passing between the counter and working electrodes. The present inventors have found that although the solution resistance remains substantially constant throughout an ECL event, the current in the cell increases near the voltage where light is emitted. As a result, if the controlled voltage waveform has a uniform scan rate, the waveform occurring at the working electrode decreases in scan rate and is found to become substantially sinusoidal in shape around the voltage at which ECL occurs. This modified waveform occurring at the working electrode, although subject to less control by the potentiostat, advantageously results in more precise and accurate ECL measurements.

This invention also comprises in another aspect synthesizing the modified waveform occurring at the working electrode, when the reference electrode is adjacent the counter electrode, and then applying this
5 synthesized waveform directly to the working electrode with the reference electrode adjacent the working electrode for more precise control.

With the reference electrode in the latter position, the operative waveform applied to the working
10 electrode can be accurately controlled and closely monitored by the potentiostat.

Since the degree to which a waveform at the reference electrode becomes modified at the working electrode is substantially a function of the current
15 flowing between the counter and working electrodes, this modified waveform can be calculated from a measure of the current flowing in the ECL cell during an ECL event. A computer or microprocessor can be used advantageously to perform this calculation and to
20 synthesize the modified waveform digitally, and the digitally synthesized waveform can be converted to an analog waveform using an analog to digital converter. The synthesized analog waveform then can be applied precisely to the working electrode using a potentiostat with the reference electrode in close potential
25 proximity to the working electrode. This method has the further advantage that small changes can be made to the synthesized waveform and accurately evaluated

for further improvement in the ECL response and measurement.

In another aspect, this invention provides apparatus for applying a modified scanning voltage waveform to the working electrode of an ECL cell. This apparatus preferably comprises a potentiostat with its reference electrode in close potential proximity to its working electrode, and the modified waveform preferably is substantially a function of the current induced in the ECL cell during the triggering of electrochemi- luminescence. Advantageously, the apparatus first synthesizes the modified waveform digitally, converts the digital waveform to an analog waveform and then applies the analog waveform to the working electrode using the potentiostat with its reference electrode in close potential proximity to the working electrode.

This invention also provides in another aspect a method for measuring electrochemiluminescent phenomena by applying a modified scanning voltage waveform to the working electrode of an ECL cell to trigger electrochemiluminescence with the modified voltage waveform being substantially a function of the current induced in the ECL cell during electrochemiluminescence. The modified voltage waveform preferably is the result of a uniform scanning voltage waveform (triangular waveform) minus

a second waveform having a magnitude substantially a function of the current induced in the ECL cell.

Advantageously, this method further comprises synthesizing the modified voltage waveform
5 digitally, converting the digital waveform to an analog waveform using an analog to digital converter and then applying the analog waveform to the working electrode of an ECL cell.

It is not intended that the invention be
10 summarized here in its entirety. Rather, further features, aspects and advantages of the invention will be set forth in, or will be apparent from, the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Fig. 1 is a front view of an apparatus according to the present invention;

Fig. 2 is a block diagram of voltage control apparatus for controlling the voltages applied to the apparatus of Fig. 1;

20 Fig. 3 is a waveform diagram illustrating voltages applied to the apparatus of Fig. 1;

Fig. 4 is a waveform diagram illustrating voltages, modified in accordance with the present invention, for application to the apparatus of Fig. 1;
25 and

Fig. 5 is a block diagram of voltage control apparatus for synthesizing and applying the voltages illustrated in Fig. 4 to the apparatus of Fig. 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 shows an ECL measuring apparatus 10 for applying the present invention. Apparatus 10 is a flow-through type ECL measuring apparatus, but, as is
5 apparent from the following description, this invention is not limited to flow-through type ECL measuring apparatus and may be employed advantageously in all types of ECL apparatus utilizing a working electrode or other triggering surface to provide
10 electrochemical energy to trigger an analyte of interest into electrochemiluminescence.

Apparatus 10 comprises an ECL cell 12, mounted on supporting structure 42, enclosed within light-tight drawer 14 which is removably mounted
15 within a larger instrument for conducting ECL measurements. This instrument also includes detecting and measuring apparatus (not shown) for detecting and measuring the light emitted from a sample within the ECL cell 12 during ECL. The detecting and measuring
20 apparatus advantageously may be a photomultiplier tube, photodiode, charge coupled device, photographic film or the like. For a further description of suitable detecting and measuring apparatus, reference is made to U.S. Patent Application Nos. 188,258 and
25 187,095, assigned in common with the present application.

Intake tubing 22, which may be constructed advantageously of stainless steel, passes through

drawer 14 into a container (not shown) holding a solution to be sampled. A pump (also not shown), which is advantageously a peristaltic pump, at the end of exit tubing 24 causes a sample of this solution to pass through the intake tubing 22 into the sample holding volume 44 of the ECL cell. Electrochemiluminescence is triggered within the cell by working electrode 18 and counter electrode 16 and is measured by the detecting and measuring apparatus. After the measurement, the sample is pumped out of the holding volume 44, through exit tubing 24 (also advantageously constructed of stainless steel), and through the reference electrode holding volume 46. This process is repeated for each sample to be tested.

15 In order to substantially duplicate operating conditions prior to and during testing from sample to sample, various cleaning and conditioning solutions advantageously are pumped into the ECL cell prior to each sample. For a description of such
20 cleaning and conditioning solutions and techniques for their application, reference is made to U.S. Patent Application No. 188,258, assigned in common with the present application.

Reference electrode 20 is incorporated
25 within exit tubing 24 and enclosed within housing 28. In this position, this electrode is exposed to substantially the same voltage potential within the solution in sample holding volume 44 as that to which

the counter electrode 16 is exposed. If housing 28 and reference electrode 20 were incorporated within the intake tubing 22, rather than the exit tubing 24, the reference electrode would be exposed to

5 substantially the same voltage potential within the sample solution as that to which the working electrode 18 is exposed. The latter position is that generally used in a conventional electrochemical cell.

Connectors 32, 34 and 36 connect the
10 reference electrode 20, working electrode 18 and counter electrode 16, respectively, to terminal connectors 30 which are connected to the voltage control circuit 60 shown in Fig. 2. Male connectors 38 and 40 are removably inserted into female
15 connectors within supporting structure 42 to enable the ECL cell to be electrically disassociated from the voltage control circuit and the working and counter electrodes to be reversed in function if desired.

Voltage control circuit 60, shown in Fig. 2,
20 advantageously operates in the manner of a potentiostat to supply a controlled voltage waveform at reference electrode 20 with respect to the working electrode 18. Connectors 62, 64 and 68 of voltage control 60 are connected to terminals 30 and then to
25 connectors 34, 36 and 32, respectively, which are connected to the working electrode 18, counter - electrode 16 and reference electrode 20, respectively, of ECL apparatus 10. An input voltage V_{in} to voltage

control 60 is provided on connector 70. Connector 62, connected to the working electrode 18, and input connector 72 are held at virtual ground.

In operation, voltage control 60 forces the
5 voltage appearing on connector 68, connected to the reference electrode 20, to duplicate V_{in} appearing on input connector 70. No significant current flows through reference electrode 20, but this electrode provides a reference against which the voltage between
10 the counter and working electrodes adjusts until the voltage at the reference electrode, with respect to the working electrode (i.e., ground), duplicates the voltage V_{in} on connector 70. Potentiostats for this purpose are well known, and the internal structure of
15 voltage control 60 may correspond to any of the conventional, commercially available potentiostats which operate in this manner.

Reference electrode 20 senses a voltage potential within the sample solution substantially
20 equivalent to that adjacent counter electrode 16. If reference electrode 20 were located within the intake tubing 22 above the working electrode 18 shown in Fig. 1, then the reference electrode would sense substantially the same potential within the solution
25 as that adjacent working electrode 18. The same result could be achieved by reversing male connectors 38 and 40 which would in effect make electrode 16 the

working electrode and electrode 18 the counter electrode.

Locating the reference electrode at a voltage potential substantially equivalent to that adjacent the working electrode enables the voltage waveform applied to the working electrode to be precisely controlled and closely monitored. This position is conventional for electrochemical cells.

Fig. 3 is a waveform diagram of voltages within ECL cell 12 during the triggering of ECL with the reference electrode 20 at a position for sensing the voltage substantially adjacent the working electrode (a position opposite to that shown in Fig. 1). Waveform 100 is the voltage applied at the reference electrode, and waveform 102 is the voltage measured within the solution by a probe substantially adjacent the counter electrode. The scan rate for the applied voltage 100 is 500 millivolts per second.

These plots show that voltage control 60, with the reference electrode and its conventional position for sensing the voltage adjacent the working electrode, forces both waveforms to be triangular and follow a substantially constant scan rate. At any given time, the voltage measured adjacent the counter electrode (waveform 102) exceeds that applied at the reference electrode (waveform 100) because of the voltage drop in the sample solution caused by the current between the working and counter electrodes.

Electrochemiluminescence is triggered at a point near the peak of both waveforms (approximately 1.4 volts applied at the reference electrode 20) without any modification or decrease in the scan rate during the
5 period of ECL.

Fig. 4 is a waveform diagram of voltages within ECL cell 12 during the triggering of ECL with the reference electrode 20 in the alternative position shown in Fig. 1 for sensing the voltage adjacent the
10 counter electrode. Waveform 110 is the voltage applied at the reference electrode, which has a uniform scan rate of 500 millivolts per second, and waveform 112 is the voltage measured within the sample solution by a probe substantially adjacent the working
15 electrode. Waveform 112 shows a decrease in the scan rate or a plateauing around the period that electrochemiluminescence occurs. The voltage measured adjacent the working electrode during this period is between 1.4 and 1.6 volts. The potentiostat, however,
20 keeps the applied voltage in the solution at the reference electrode adjacent the counter electrode, waveform 110, at the uniform, selected scan rate. The latter voltage exceeds the voltage adjacent the working electrode during chemiluminescence by
25 approximately .8 volts because of the voltage drop between the counter and working electrodes resulting from the cascading of current during this period. This phenomenon keeps the voltage adjacent the working

electrode at substantially that necessary to maintain electrochemiluminesce without overshooting this voltage and disadvantageously accelerating the event. This result enables a more precise and accurate
5 electrochemiluminescent response and measurement of data.

Fig. 5 shows a second embodiment of apparatus for control of the voltages applied to the apparatus of Fig. 1. This second embodiment
10 advantageously synthesizes the waveform digitally that is applied at the reference electrode, with respect to the working electrode, using digital computer 120. This digitally synthesized waveform advantageously is equivalent to waveform 112, the waveform resulting at
15 the working electrode with the reference electrode in its alternative position adjacent the counter electrode, when the waveform applied at the reference electrode is a uniform scanning voltage waveform. This synthesized waveform is applied to ECL cell 12
20 with reference electrode 20 in its conventional position adjacent working electrode 18. The digital synthesization of the waveform also can be effected with a microprocessor, special purpose computer or similar digital device.

25 Since the potential drop between the counter and working electrodes is primarily a function of the current flowing between these electrodes, the digitally synthesized waveform can be calculated from

a measure of the current flowing in the ECL cell during ECL with the reference electrode in its alternative position adjacent the counter electrode.

This current times the resistance of the sample

5 solution defines a second waveform which is subtracted from the uniform scanning voltage waveform (triangular waveform) applied at the reference electrode to create the modified waveform.

The digitally synthesized waveform is fed
10 through data lines 126 to digital to analog converter 122 whose output on connector 128, with respect to that appearing on connector 130 which is held at virtual ground, is the corresponding synthesized waveform in analog form. The voltage appearing on
15 connector 128 is the input voltage V_{in} to voltage control 124 which, like voltage control 60, advantageously operates in the manner of a potentiostat to supply a controlled voltage waveform substantially identical to V_{in} on connector 136 with
20 respect to connector 132 (virtual ground). In this embodiment, reference electrode 20 is located within the intake tubing 22 (opposite to the position shown in Fig. 1) for sensing the voltage potential within the sample solution substantially equivalent to that
25 surrounding working electrode 18. Connectors 132, 134 and 136 of voltage control 124 are connected through terminals 30 to connectors 34, 36 and 32, respectively, and, therefore, to the working electrode

18, counter electrode 16 and reference electrode 20, respectively, of ECL apparatus 10.

In this embodiment, the applied scanning waveform is synthesized with its desirable plateau and substantially sinusoidal shape around the voltage for triggering ECL, and this waveform is precisely applied directly to the working electrode. This embodiment also enables minor modifications to be made in the synthesized waveform, and the degree to which they improve or adversely affect ECL response and measurements, to be directly correlated.

Although embodiments of the present invention have been described in detail herein with reference to the accompanying drawings, it is apparent that the invention is not limited to these embodiments and drawings and that various changes and modifications may be effected by one skilled in the art without departing from the spirit and scope of the invention as defined in the following claims.

20

25

CLAIMS

1. Apparatus for measuring
electrochemiluminescent phenomena of a sample,
5 comprising:
 - (a) cell means for holding the sample;
 - (b) voltage control means, including a
working electrode, a counter electrode, and a
reference electrode, said working electrode being
10 located within said cell means so as to be exposable
to said sample for triggering electrochemiluminescence
therein, said reference electrode being located so as
to sense the voltage substantially adjacent said
counter electrode, and said voltage control means
15 being adapted to apply a controlled voltage waveform
at said reference electrode with respect to said
working electrode; and
 - (c) radiation detection means for detecting
electrochemiluminescent radiation from said sample.
20
2. An apparatus as in claim 1, wherein said
voltage control means comprises a potentiostat.
3. An apparatus as in claim 1, wherein said
25 controlled voltage waveform is substantially
triangular in shape.

4. An apparatus as in claim 1, wherein said controlled voltage waveform is a uniform scanning voltage waveform.
- 5 5. An apparatus as in claim 1, wherein said reference electrode is incorporated within tubing through which the sample is pumped from the cell after the triggering of electrochemiluminescence.
- 10 6. Apparatus for measuring electrochemiluminescent phenomena of a sample, comprising:
- (a) cell means for holding the sample;
 - (b) voltage control means, including a
- 15 \ working electrode, a counter electrode, and a reference electrode, said working electrode being located within said cell means so as to be exposable to said sample for triggering electrochemiluminescence therein, said reference electrode being located so as
- 20 to sense the voltage substantially adjacent said working electrode, and said voltage control means being adapted to apply a controlled voltage waveform at said reference electrode with respect to said working electrode, said controlled voltage waveform
- 25 being substantially a function of the current induced in said sample during the triggering of electrochemiluminescence; and

(c) radiation detection means for detecting electrochemiluminescent radiation from said sample.

7. An apparatus as in claim 6, wherein said
5 voltage control means comprises a potentiostat.

8. An apparatus as in claim 6, wherein said reference electrode is incorporated within tubing through which the sample is pumped into the cell.
10

9. An apparatus as in claim 6, wherein said controlled voltage waveform is substantially sinusoidal in shape in the voltage range for which electrochemiluminescence is triggered.
15

10. An apparatus as in claim 6, wherein said controlled voltage waveform is a uniformly increasing voltage waveform which becomes substantially flat within a portion of the voltage range for which
20 electrochemiluminescence is triggered.

11. An apparatus as in claim 6, further comprising digital processing means for synthesizing said controlled voltage waveform in digital form, and
25 means for converting said digital waveform to an analog waveform.

12. A method for measuring electrochemiluminescent phenomena of a sample, said method comprising the steps of:

- (a) introducing said sample into a cell
5 having a working electrode located within said cell so as to be exposable to said sample;
- (b) applying a controlled voltage waveform to said working electrode to trigger electrochemiluminescence in said sample;
- 10 (c) generating said controlled voltage waveform substantially as a function of the current induced in said sample during the triggering of electrochemiluminescence; and
- (d) detecting electrochemiluminescent
15 radiation from said sample.

13. A method as in claim 12, further comprising the steps of synthesizing said controlled voltage waveform in digital form and converting said digital
20 waveform to an analog waveform.

14. A method as in claim 12, wherein said controlled voltage waveform is substantially sinusoidal in shape in the voltage range for which
25 electrochemiluminescence is triggered.

15. A method as in claim 12, wherein said controlled voltage waveform is a uniformly increasing

voltage waveform which becomes substantially flat within a portion of the voltage range for which electrochemiluminescence is triggered.

5 16. An apparatus for measuring

electrochemiluminescent phenomena of a sample, comprising:

(a) cell means for holding the sample;

(b) voltage control means, including a
10 working electrode, a counter electrode, and a reference electrode, said working electrode being located within said cell means so as to be exposable to said sample for triggering electrochemiluminescence therein, said reference electrode being located so as
15 to sense the voltage substantially adjacent said working electrode, and said voltage control means being adapted to apply a controlled voltage waveform at said reference electrode with respect to said working electrode, said controlled voltage waveform
20 being substantially sinusoidal in shape in the voltage range for which electrochemiluminescence is triggered; and

(c) radiation detection means for detecting electrochemiluminescent radiation from said sample.

25

17. An apparatus as in claim 16, wherein said voltage control means comprises a potentiostat.

18. An apparatus as in claim 16, wherein said reference electrode is incorporated within tubing through which the sample is pumped into the cell.

5 19. An apparatus as in claim 16, further comprising digital processing means for synthesizing said controlled voltage waveform in digital form, and means for converting said digital waveform to an analog waveform.

10

20. An apparatus as in claim 16, further comprising fluid transporting means for transporting said sample into and out of said cell and wherein said cell is a flow-through type cell.

15

21. An apparatus as in claim 16, wherein said voltage range is between approximately 1.4 and 1.6 volts.

20

22. Apparatus for measuring electrochemiluminescent phenomena of a sample, comprising:

(a) cell means for holding the sample;

(b) voltage control means, including a

25

working electrode, a counter electrode, and a reference electrode, said working electrode being located within said cell means so as to be exposable to said sample for triggering electrochemiluminescence

therein, said reference electrode being located so as to sense the voltage substantially adjacent said working electrode, and said voltage control means being adapted to apply a controlled voltage waveform at said reference electrode with respect to said working electrode, said controlled voltage waveform being substantially flat within a portion of the voltage range for which electrochemiluminescence is triggered; and

10 (c) radiation detection means for detecting electrochemiluminescent radiation from said sample.

23. An apparatus as in claim 22, wherein said voltage control means comprises a potentiostat.

15

24. An apparatus as in claim 22, wherein said reference electrode is incorporated within tubing through which the sample is pumped into the cell.

20 25. An apparatus as in claim 22, further comprising digital processing means for synthesizing said controlled voltage waveform in digital form, and means for converting said digital waveform to an analog waveform.

25

26. An apparatus as in claim 22, further comprising fluid transporting means for transporting

said sample into and out of said cell and wherein said cell is a flow-through type cell.

27. An apparatus as in claim 22, wherein said
5 voltage range is between approximately 1.4 and 1.6 volts.

28. A method for measuring
electrochemiluminescent phenomena of a sample, said
10 method comprising the steps of:

(a) introducing said sample into a cell
having a working electrode located within said cell so
as to be exposable to said sample;

(b) applying a controlled voltage waveform
15 to said working electrode to trigger
electrochemiluminescence in said sample; and

(c) generating said controlled voltage
waveform such that said waveform is substantially
sinusoidal in shape in the voltage range for which
20 electrochemiluminescence is triggered; and

(d) detecting electrochemiluminescent
radiation from said sample.

29. A method as in claim 28, further comprising
25 the steps of synthesizing said controlled voltage
waveform in digital form and converting said digital
waveform to an analog waveform.

30. A method for measuring electrochemiluminescent phenomena of a sample, said method comprising the steps of:

- (a) introducing said sample into a cell
- 5 having a working electrode located within said cell so as to be exposable to said sample;
- (b) applying a controlled voltage waveform to said working electrode to trigger electrochemiluminescence in said sample;
- 10 (c) generating said controlled voltage waveform such that said waveform becomes substantially flat within a portion of the voltage range for which electrochemiluminescence is triggered; and
- (d) detecting electrochemiluminescent
- 15 radiation from said sample.

31. A method as in claim 30, further comprising the steps of synthesizing said controlled voltage waveform in digital form and converting said digital

20 waveform to an analog waveform.

32. A method as in claim 30, wherein said voltage range is between approximately 1.4 and 1.6 volts.

25

33. An apparatus for operating a working electrode in a cell adapted to trigger electrochemiluminescence in a solution, comprising:

(a) holding means for receiving and holding the solution;

(b) working electrode means associated with said holding means and adapted to be exposed to said
5 solution; and

(c) voltage control means for applying a voltage waveform to said working electrode means to trigger electro- chemiluminescence in said solution, said waveform being substantially a function of the
10 current induced in said solution during said triggering.


34. An apparatus as in claim 33, wherein said voltage control means comprises a potentiostat.
15

35. An apparatus as in claim 33, further comprising digital processing means for synthesizing said voltage waveform in digital form, and means for converting said digital waveform to an analog
20 waveform.

25

1/3

FIG. 1

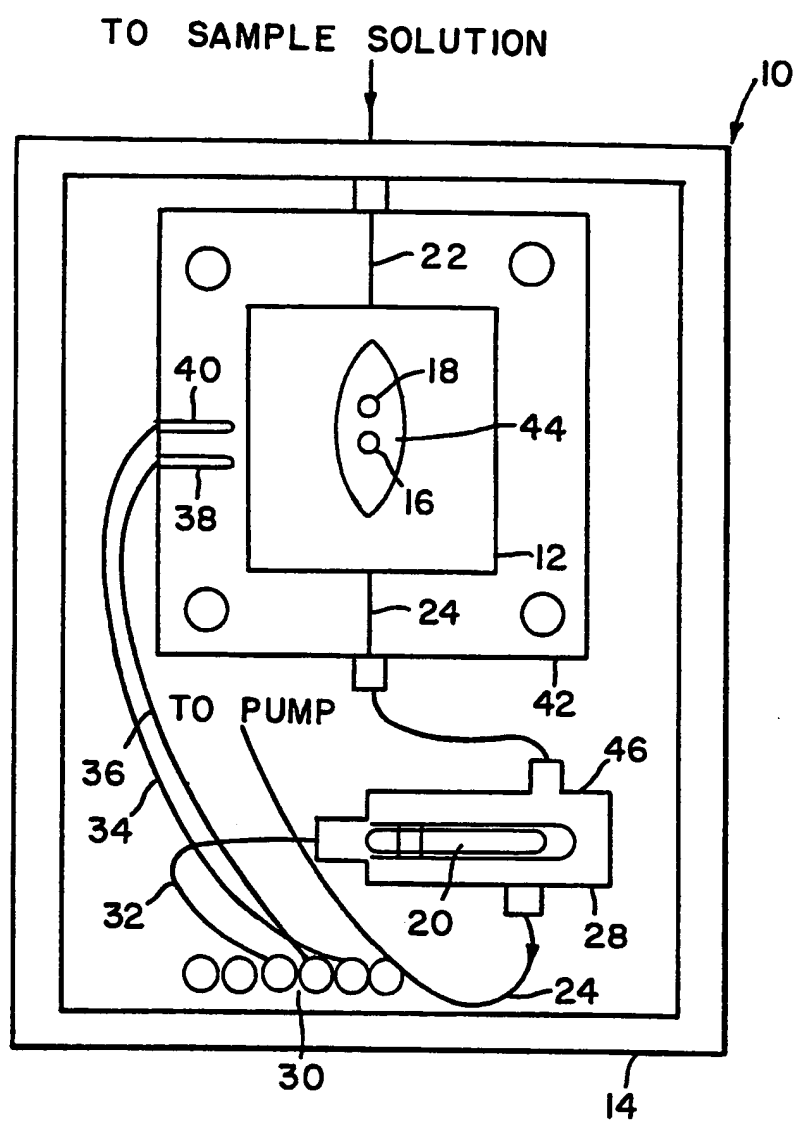

SUBSTITUTE SHEET

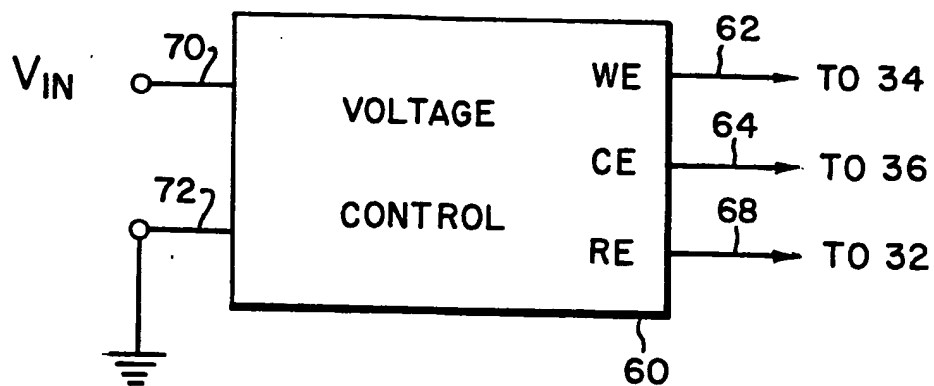


FIG. 2



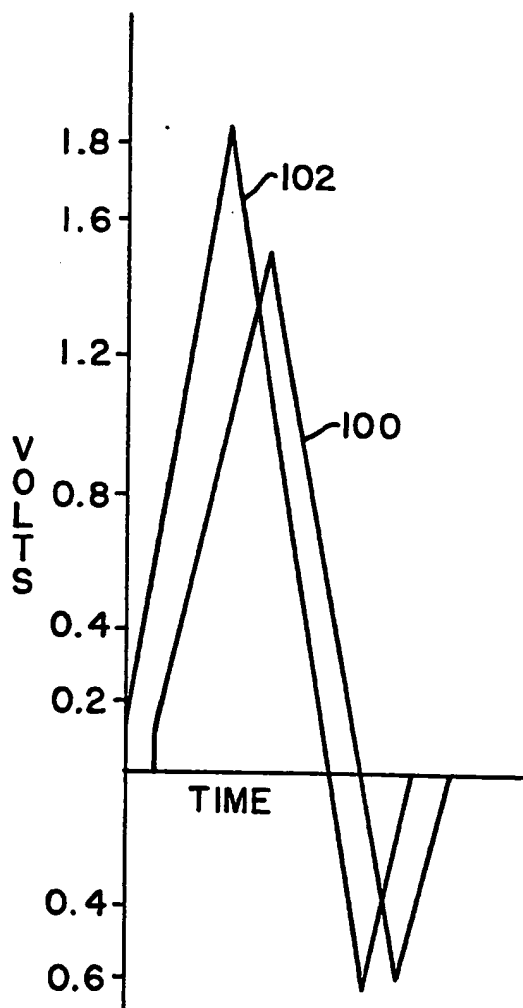


FIG. 3

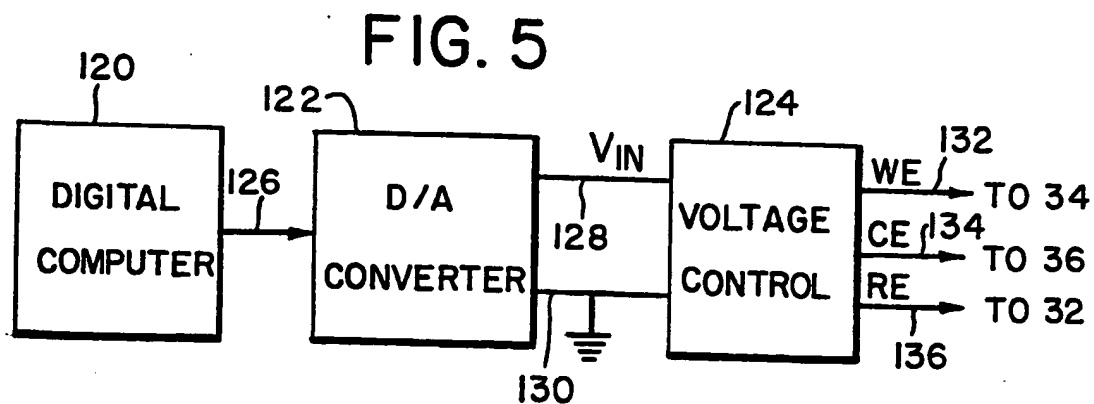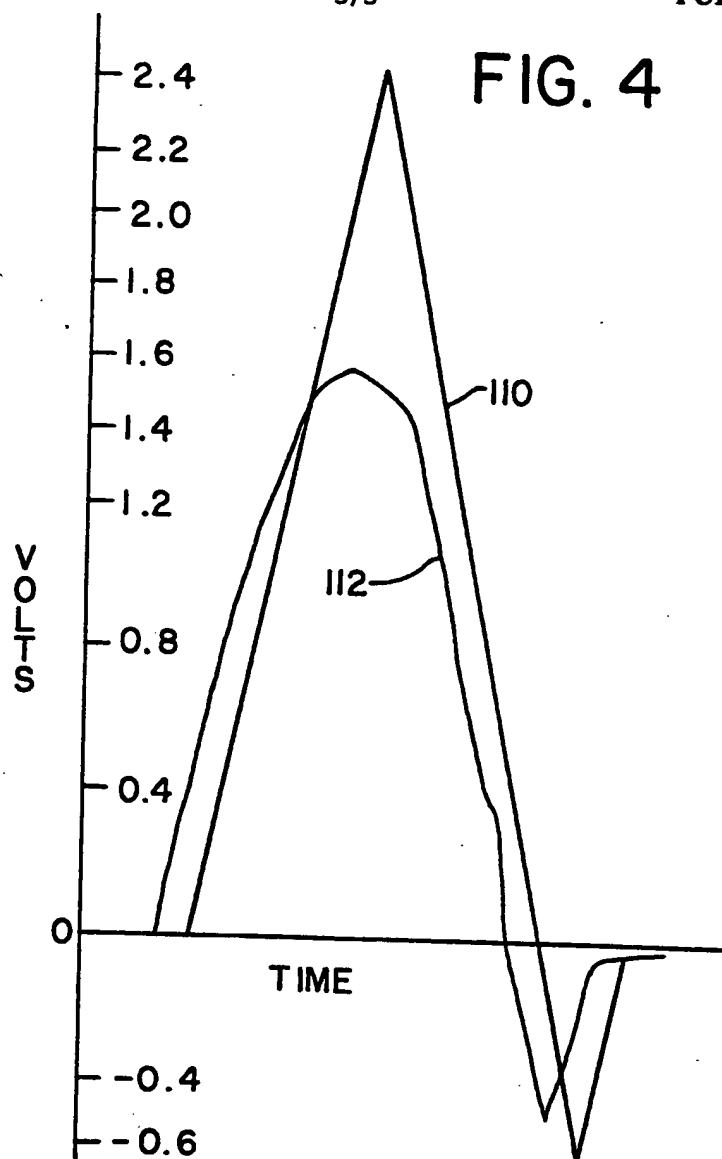

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US90/01370**

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) *		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC (5) : G01N 21/76; H01J 1/62; H03K 4/00, 4/02, 4/06		
U.S. Cl : 422/52; 324/94; 328/178; 313/498; 250/261C		
II. FIELDS SEARCHED		
Minimum Documentation Searched *		
Classification System	Classification Symbols	
U.S.	422/52; 315/169.3, 246; 313/498, 505; 250/261C; 340/781; 350/331R, 332; 328/181, 178, 228, 261, 268, 186; 307/353; 204/231, 412; 365/153, 110, 111; 324/94	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched *		
III. DOCUMENTS CONSIDERED TO BE RELEVANT 14		
Category *	Citation of Document, 15 with indication, where appropriate, of the relevant passages 17	Relevant to Claim No. 18
Y	US,A 4,771,215 (MUNAKATA ET AL) 13 September 1988 See entire disclosure.	1-35
Y	US,A 4,591,733 (SCHRODER) 27 May 1986 See entire disclosure.	6-10, 12, 14, 15, 33 & 34
Y	US,A 4,303,410 (COPELAND) 01 December 1981 See element 20, Column 3, Line 49 to Column 4, Line 15.	11, 13, 19, 25, 29, 31 & 35
Y	US,A 4,443,713 (LAYTON) 17 April 1984 See entire disclosure.	1-5 & 16-32
Y,P	WO,A1,89/10551 (IGEN, INC.) 02 November 1989 See entire document.	1-35
<p>* Special categories of cited documents: 13</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search *	Date of Mailing of this International Search Report *	
01 June 1990	26 JUL 1990	
International Searching Authority *	Signature of Authorized Officer 20	
ISA/US	NGUYEN NGOC-EO INTERNATIONAL DIVISION Amalia L. Santiago	